
All in one

DPF/SCR with integrated Silencer

hugengineering.

benefits

- Easy to install within engine or genset contours
- Single source exhaust engineering and delivery
- Easy integration on top of genset
- **Highest ash tolerance** to allow long service intervals
- Save costs on urea thanks to the IMO Tier II/IMO Tier III switchable feature
- **Short lead time** less engineering alignment
- Optimized back pressure
- Performance guaranteed

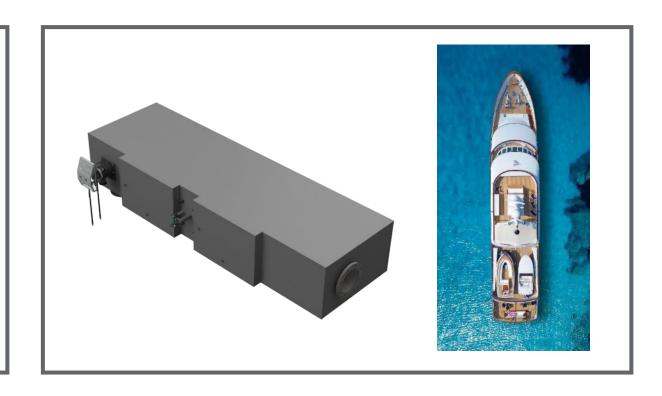

technical description

- 35db(A) insertion loss as standard
- Active regenerated DPF reduces black carbon emissions to more than 98%
- Robust full flow regeneration burner
- Single service side

applications

- Displacement Yachts
- Semi displacement Yachts
- Port authority vessels
- Gensets up to 500 kW

innovation

RFQ ready

In production

certifications



Other type approvals on request